


## Door Features

- Continuously welded seamless edge
- Highest quality construction
- 1-3/4" thickness standard
  - other thicknesses available
- High quality A60 Galvannealed Steel
  - G90 and stainless optional
  - 18, 16, 14, and 12 gauge available
- Rust inhibitive prime coat
- End-caps inverted standard (flush optional)
- Beveled or square edges
- Fire rated to 3 hours
- Standard hardware reinforcements
  - 7 ga. hinge, 1/4" backset standard
  - 16 ga. "161" lock
  - 14 ga. "86" lock
  - 14 ga. closer




## Core Options & Performance Data (est.)

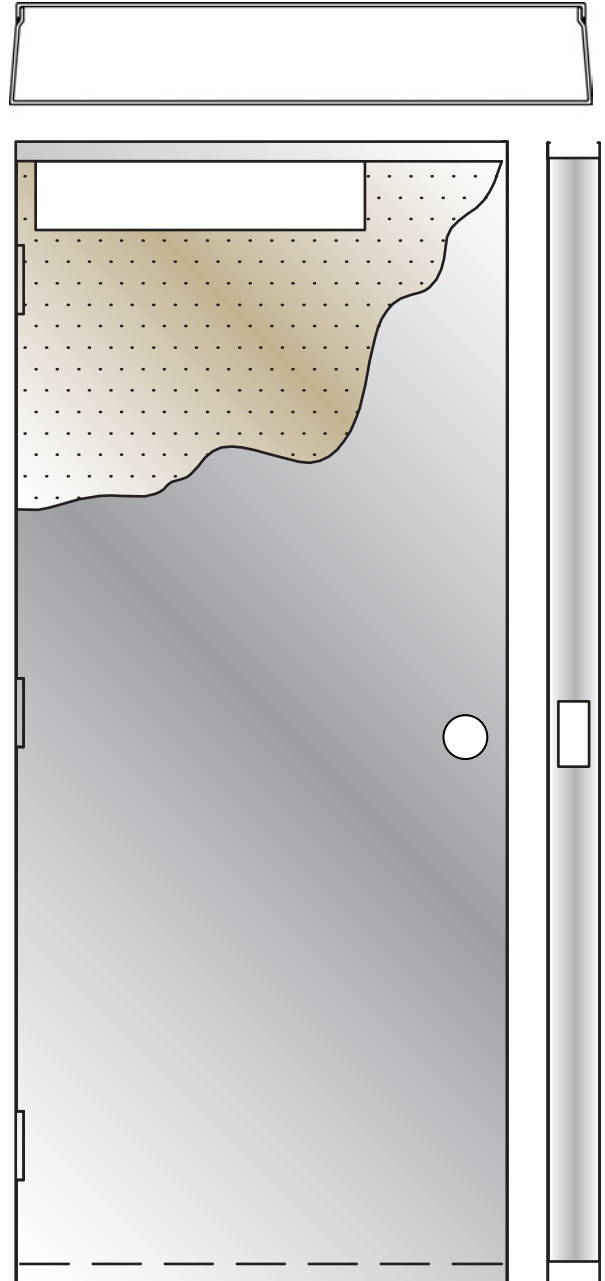


Polystyrene

R Factor = 6.87  
 U Factor = .146  
 Acoustical = STC 32



Honeycomb

R Factor = 2.62  
 U Factor = .381  
 Acoustical = STC 32



Steel Stiffened

R Factor = 1.17  
 U Factor = .855  
 Acoustical = STC 24



Temperature Rise

250° at 30 minutes  
 450° at 60 minutes